

Utilizing the 3-point hitch connection, Rears CVHitch allows maximum brush clearance and minimizes brush feeding interference.

- 1** The floating rake tooth maintains a constant relationship with the blade swing line over uneven terrain: this consistent, tight tolerance eliminates brush buildup on rakes.
- 2** Material is pulverised by three shear bars mounted across the width of the flail housing: 1 bolt-in replaceable angle re-cutter, 1 bolt-in replaceable interference channel, and 1 weld-in recutter. Each knife will pass between the shear bar teeth 33 times a second.
- 3** The 3/16" thick steel housing is further reinforced by a replaceable 3/16" bolt-in steel liner.
- 4** Full width brush shield integrated with the hitch for seamless flow of material from tractor into throat of shredder.

5 3.5lb FL8041 hammers with Tungsten Carbide embedded hardfacing. 3/4" mount pads with hardened spring bushing.





Cutting width 60" - 120" available

Overall width, single drive +16"; dual drive +20"

0-6" cut height

3 shearbars mounted full cutting width

- 1- bolt-in replaceable angle re-cutter
- 1- bolt-in replaceable interference channel
- 1- weld-in recutter

Flail housing- 3/16" steel

Replaceable bolt-in liner- 3/16" steel

Drawbar Rears Constant Velocity Hitch, CAT2

with full width brush shield
Other hitch options are available

Rotor Tube 8-5/8" OD, 1/2" wall thickness.

Rotor Shaft 2-7/16" shaft, bolt-on replaceable

Rotor Bearings 2-7/16" double row spherical bearing
with auxilliary grease labyrinth protection

Hammers FL8041, 5/8" thick, 7-1/4" long, 3.5lbs
tungsten carbide embedded hardfacing

Tip speed 13,624 ft/min

Rotation Reverse

Hammer mounts 3/4" thick pads, hardened spring bushings

Belt Drive 5-groove 5V Powerband, single drive
4-groove 4V Powerband, dual drive

Quick draw belt tension system

Idler-free system, adjust pulley center distance to set tension.

Floating rake teeth retract automatically with axle pantograph.

12" rake spacing standard, other rake spacings are available
Single rake tines standard, *Triple Rakes* available
Adjustable maximum depth
Rake swing radius designed to match blade swing line


CAT6 Input Driveline

Pivoting front rubber flap deflectors

Hydraulically actuated lift axle.

(2) 9.5L x 15 rib-implement tires on single struts, standard.
Dual struts, (4) tires, optional
20 ply 11L aircraft tire upgrade available

Hardened 2-7/16" rotor shaft is easily replaced.

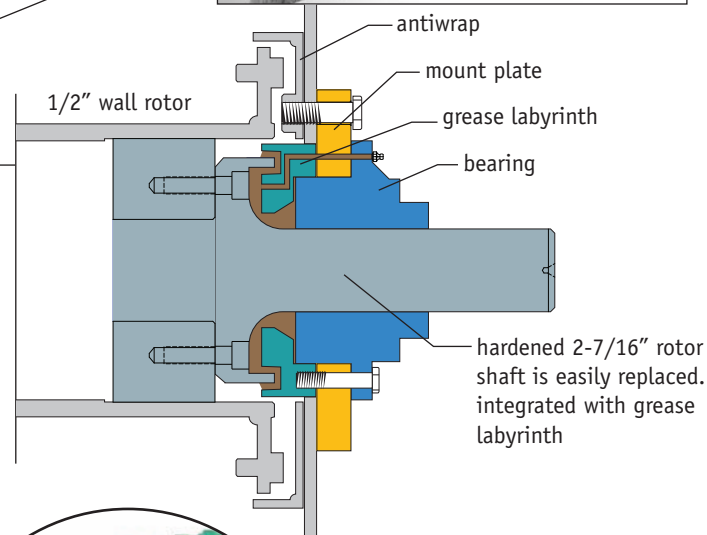

Triple rake option.



**For more information,
or the location of your nearest dealer,
please call 800.547.8925**

rears manufacturing company inc. eugene, oregon

REARS